



SCAN FOR
MORE INFO



GBMU



Let's make it better together

3-way adjustable 180° hinge

ADJUSTABLE

GALVANIZED



PREMIUM QUALITY



Find out more: locinoxusa.com | help@locinoxusa.com



SCAN FOR
MORE INFO

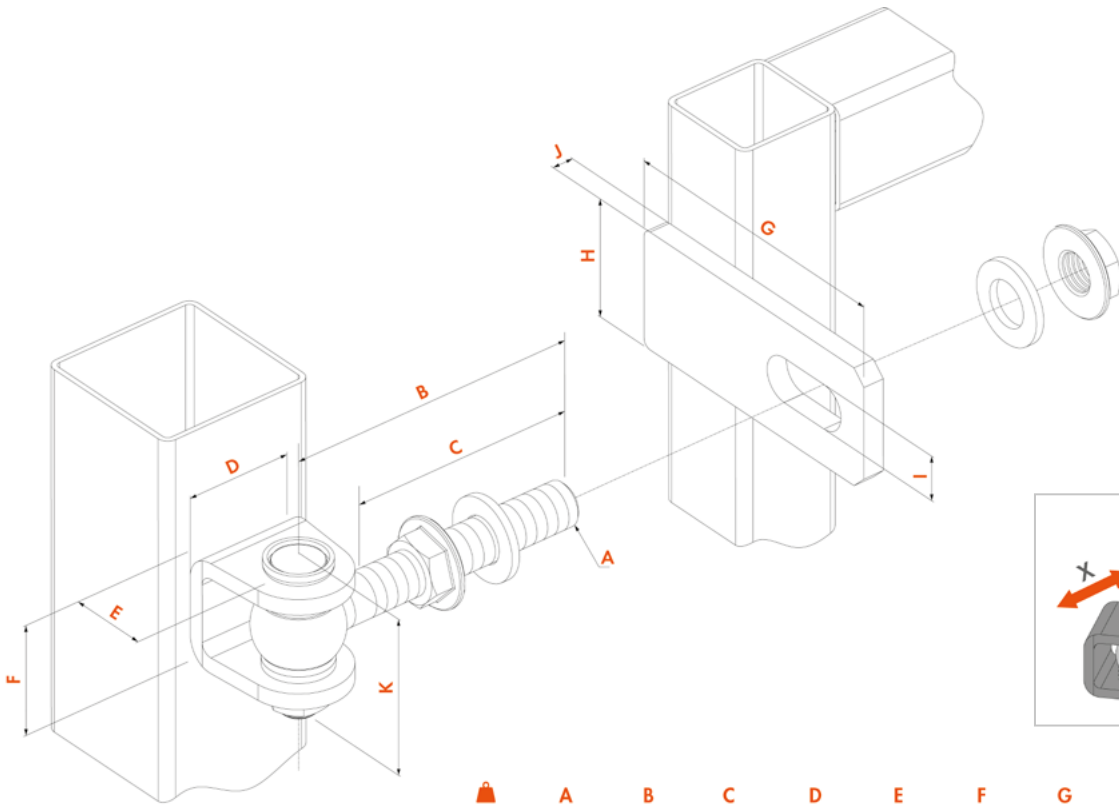

		A	B	C	D	E	F	G	H	I	J	K
GBMU-X-M12-90	220 lbs	M12	3-9/16"	2-3/4"	1-3/8"	15/16"	1-1/4"	3-9/16"	1-3/8"	1/2"	1/4"	1-7/8"
GBMU-X-M16-110	440 lbs	M16	4-5/16"	3-3/8"	1-9/16"	1-3/16"	1-5/8"	4-5/16"	1-3/4"	11/16"	5/16"	2-3/8"
GBMU-X-M16-150	440 lbs	M16	5-15/16"	4-15/16"	1-9/16"	1-3/16"	1-5/8"	4-5/16"	1-3/4"	11/16"	5/16"	2-3/8"
GBMU-X-M18-105	550 lbs	M18	4-1/8"	3-1/8"	2"	1-3/16"	1-5/8"	4-3/4"	2"	3/4"	5/16"	2-7/16"
GBMU-X-M18-150	550 lbs	M18	5-15/16"	4-15/16"	2"	1-3/16"	1-5/8"	4-3/4"	2"	3/4"	5/16"	2-7/16"
GBMU-X-M20-130	880 lbs	M20	5-1/8"	4-1/8"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	13/16"	1/2"	2-13/16"
GBMU-X-M20-150	880 lbs	M20	5-15/16"	4-1/2"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	13/16"	1/2"	2-13/16"
GBMU-X-M22-145	970 lbs	M22	5-11/16"	4-1/2"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	15/16"	1/2"	2-15/16"
GBMU-X-M22-160	970 lbs	M22	6-5/16"	5-1/8"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	15/16"	1/2"	2-15/16"

LOCINOX®



GBMU

3-way adjustable 180° hinge

3-way adjustable hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. The welding parts are available in black steel or zinc plated.

Specifications

- 180° opening and closing angle
- Eyebolt, bolt & nut, hot-dip galvanized
- U-shaped ear plate and groove plate in black steel or zinc plated to weld on
- Available in M12, M16, M18, M20, M22
- Packed per 50 pieces or per pair